

How do we Describe Aircraft Noise?

We use a number of terms to describe aircraft noise. These metrics form the basis for the majority of noise analyses conducted at most airports in the U.S.

The Decibel, dB

All sounds come from a source – a musical instrument, a voice speaking, an airplane. The energy that produces these sounds is transmitted through the air in waves, or sound pressures, which impinge on the ear, creating the sound we hear.

The decibel is a ratio that compares the sound pressure of the sound source of interest (e.g., the aircraft overflight) to a reference pressure (the quietest sound we can hear). Because the range of sound pressures is very large, we use logarithms to simplify the expression to a smaller range, and express the resulting value in decibels (dB). Two useful rules of thumb to remember when comparing individual noise sources are: (1) most of us perceive a six to ten dB increase to be about a doubling of loudness, and (2) changes of less than about three dB are not easily detected outside of a laboratory.

The A-Weighted Decibel, dB(A)

Frequency, or “pitch”, is an important characteristic of sound. When analyzing noise, we are interested in how much is low-, middle-, and high-frequency noise. This breakdown is important for two reasons. First, our ears are better equipped to hear mid- and high-frequencies; thus, we find mid- and high-frequency noise more annoying. Second, engineering solutions to noise problems are different for different frequency ranges. The “A” filter approximates the sensitivity of our ear and helps us to assess the relative loudness of various sounds.

Maximum A-weighted Sound Level, L_{max}

A-weighted sound levels vary with time. For example, the sound increases as an aircraft approaches, then falls and blends into the background as the aircraft recedes into the distance. Figure 1 illustrates this phenomenon. We often describe a particular noise “event” by its maximum sound level (L_{max}). Figure 2 shows typical L_{max} values for some common noise sources. In fact, two events with identical L_{max} may produce very different total exposures. One may be of very short duration, while the other may be much longer.

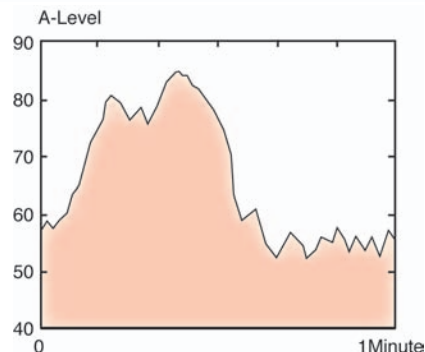


Figure 1. A-weighted Sound Levels Over Time

Sound Exposure Level, SEL, and Single Event Noise Exposure Level, SENEL

SEL is most common measure of cumulative noise exposure for a single aircraft flyover. Mathematically, it is the sum of the sound energy over the entire duration of a noise event – one can think of it as an equivalent noise event with a one-second duration. Figure 3 shows the portion of the sound energy included in this event. Because the SEL is normalized to one second, it will almost always be larger in magnitude than the L_{max} for the event. In fact, for most aircraft events, the SEL is about 7 to 12 dB higher than the L_{max}. The

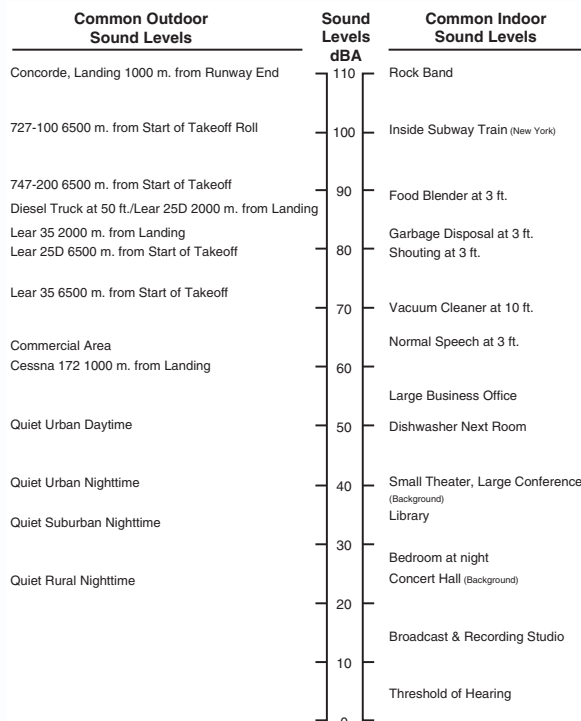


Figure 2. Common Environmental Sound Levels

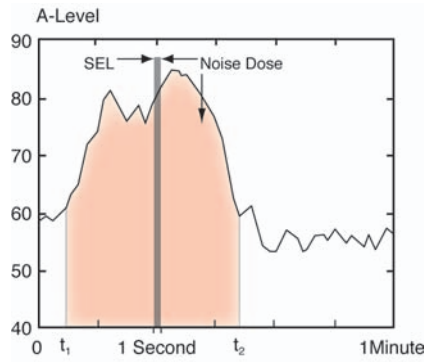


Figure 3. Sound Exposure Level

fact that it is cumulative measure means that a higher SEL can result from either a louder or longer event, or some combination. California law¹ specifies the use of SENEL, which is a slight variant of SEL, in that it considers the noise level over a period during which the noise level exceeds a threshold level, rather than over its entire duration. In most situations, the SEL and SENEL are identical.

Day-Night Average Sound Level, DNL, and Community Noise Equivalent Level, CNEL

DNL and CNEL are measures of cumulative noise exposure over a 24-hour period, with adjustments to reflect the added intrusiveness of noise during certain times of the day. DNL includes a single adjustment period; each aircraft noise event at night (defined as 10 p.m. to 7 a.m.) is counted ten times. CNEL adds a second adjustment period; in addition to the nighttime adjustment, each aircraft noise event in the evening (defined at 7 p.m. to 10 p.m.) is counted three times. The nighttime adjustment is equivalent to increasing the noise levels during that time interval by 10 dB. The evening adjustment is equivalent to increasing the noise levels by approximately 4.77 dB.

Figure 4 depicts a hypothetical daily noise dose. The top frame repeats the one-minute noise exposure that was shown in Figure 1. The center frame includes this one-minute interval within a full hour; now the shaded area represents the noise during that hour with 16

noise events, each producing an SEL. Finally, the bottom frame includes the one-hour interval within a full 24 hours. Here the shaded area represents the noise dose over a full day.

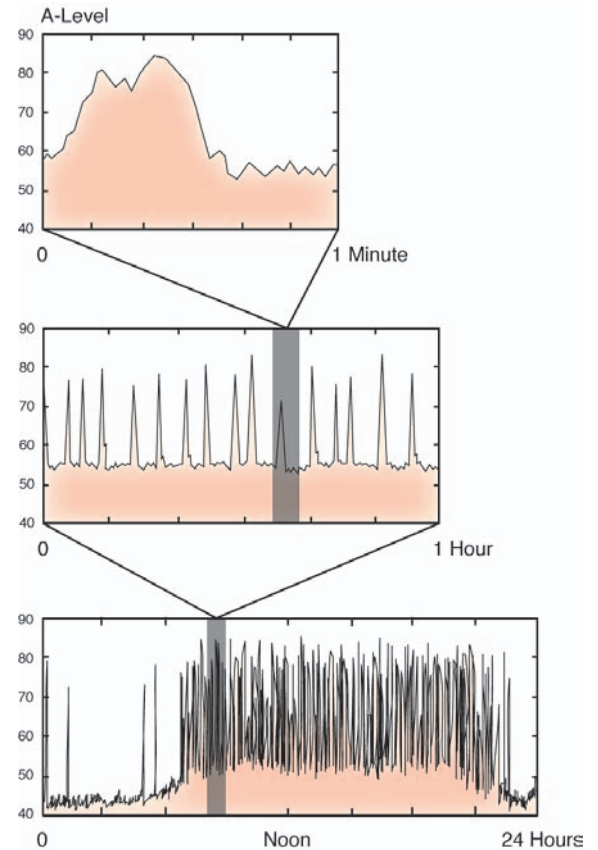


Figure 4. Daily Noise Dose

Most aircraft noise studies utilize computer-generated estimates of DNL or CNEL, determined by accounting for the SEL or SENEL values (as appropriate) from individual events affecting a given point on the ground, adjusted for evening and night as appropriate. Computed values of DNL or CNEL generally are depicted as noise contours reflecting lines of equal exposure around an airport (much as topographic maps indicate contours of equal elevation). California noise regulations require airports in the state to use CNEL. FAA has approved the use of CNEL for that purpose.

¹ "California Airport Noise Standards", California Administrative Code, Title 21, Public Works, Chapter 2.5, Subchapter 6)



HARRIS MILLER MILLER & HANSON INC.

Consultants in Noise and Vibration Control

www.hmmh.com